

# 627C/628C SERIES

## Power Combo D-Sub Connectors: Vertical

### Features:

- Signal, along with power or coaxial contacts within one connector
- Space saving on the PCB and I/O designs
- Available in various pin out configurations
- Pin and socket contact mating design with P.C. tail and solder cup termination
- Metal shell provides EMI/RFI shielding, plug shell indents provide grounding and additional mating retention
- Mounting options for panel mount or connector mating include through hole, threaded hole and threaded standoffs
- D-shaped connector mating outline provides polarization



### Specifications:

	Power/Coaxial Only	Combination
Insulator Material	Thermoplastic Polyester, UL 94V-0, Color: Black	
Contact Material	Copper Alloy	
Contact Plating	Selective Gold (See Ordering Code) over Nickel for the Mating Area, Tin Plating for Tail Area	
Shell Material and Plating	Steel, Sn or Ni Plated	
Shell Material	Nickel Plated Steel	
Current Rating (Power Contacts)	10 amps, 20 amps, 30 amps, 40 amps	
Current Rating (Signal Contacts)		5 amps
Voltage Rating	125 V	
Contact Resistance (Power Contacts)	1 Milliohms maximum	
Contact Resistance (Signal Contacts)		10 Milliohms maximum
Insulation Resistance	5000 megaohms minimum	
Dielectric Withstanding Voltage	1000 V AC rms at Sea Level	
Operating Temperature	-55°C To +125°C	
Mating Cycle	500 For 30 Microinches Gold Plating, 50 For Gold Flash Plating	

### Ordering Code:

**627-2W2-220-1N2**

SERIES: \_\_\_\_\_

627: PLUG (PIN)

628: RECEPTACLE (SOCKET)

LAYOUT: \_\_\_\_\_

	POWER/CO-AX ONLY	COMBINATION		
SIZE 9 CONTACT SHELL	2W2	2WK2	5W1	
SIZE 15 CONTACT SHELL	3W3	3WK3	7W2	11W1
SIZE 25 CONTACT SHELL	5W5		9W4	13W3
SIZE 37 CONTACT SHELL	8W8		13W6	17W2
SIZE 50 CONTACT SHELL			24W7	36W4
			43W2	47W1
8W8	2W2			

TOTAL NO. OF POWER OR CO-AX CONTACTS \_\_\_\_\_ MALE FEMALE COMBINATION \_\_\_\_\_  
TOTAL NO. OF CONTACTS \_\_\_\_\_

CONTACT PLATING THICKNESS: \_\_\_\_\_

2 - GOLD FLASH PLATING

6 - 30 MICROINCHES OF GOLD PLATING

TAIL TYPE: \_\_\_\_\_

22 - SOLDER CUP

24 - PC TAIL

#### MOUNTING OPTIONS:

- 1 - THROUGH HOLE
- 2 - #4-40 UNC THREADED HOLE 2.70
- 3 - #4-40 UNC THREADED HOLE 7.40 (PC TAIL ONLY)
- 4 - #4-40 UNC THREADED STANDOFF (PC TAIL ONLY)
- 5 - #4-40 UNC THREADED HOLE WITH BOARDLOCKS (PC TAIL ONLY)
- 6 - #4-40 UNC THREADED STANDOFF WITH BOARDLOCKS (PC TAIL ONLY)
- A - M3 THREADED HOLE 2.70
- B - M3 THREADED HOLE 7.40 (PC TAIL ONLY)
- C - M3 THREADED STANDOFF (PC TAIL ONLY)
- D - M3 THREADED HOLE WITH BOARDLOCKS (PC TAIL ONLY)
- E - M3 THREADED STANDOFF WITH BOARDLOCKS (PC TAIL ONLY)

#### SHELL PLATING:

- N - NICKEL  
T - TIN





















#### RATING:

POWER CONTACT	COAXIAL CONTACT
CURRENT RATING:	IMPEDANCE RATING:
1 - 10A	5 - 50 OHMS
2 - 20A	7 - 75 OHMS
3 - 30A	
4 - 40A	

# 627C/628C SERIES

## Power Combo D-Sub Connectors: Vertical

### Layout:


	POWER/COAXIAL D-SUB ONLY	COMBINATION
SIZE 9	 2W2  2WK2	 5W1
SIZE 15	 3W3  3WK3	 7W2  11W1
SIZE 25	 5W5	 9W4  13W3  17W2  21W1
SIZE 37	 8W8	 13W6  25W3  27W2  21W4
SIZE 50		 24W7  36W4  43W2  47W1

# 627C/628C SERIES


## Power Combo D-Sub Connectors: Vertical

### STRAIGHT PCB TYPE MOUNTING OPTION


CODE:1




CODE:2/A




CODE:3/B




CODE:4/C



CODE:5/D




CODE:6/E




### PCB LAYOUT FOR POWER D-SUB MALE AND FEMALE CONNECTOR


CODE:2W2/2WK2




CODE:3W3/3WK3




CODE:5W5 MALE




CODE:8W8 MALE

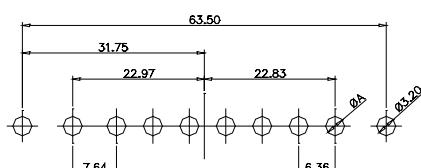

CODE:5W5 FEMALE



CODE:8W8 FEMALE

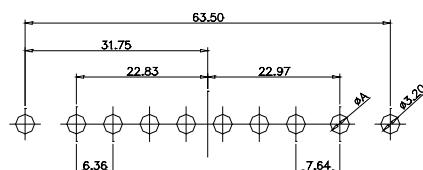

CURRENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2


# 627C/628C SERIES

## Power Combo D-Sub Connectors: Vertical


### Power/Coaxial D-SUB

#### STRAIGHT PCB TYPE MOUNTING OPTION


CODE:1




CODE:2/A




CODE:3/B




CODE:4/C



CODE:5/D




CODE:6/E




#### PCB LAYOUT FOR POWER D-SUB MALE AND FEMALE CONNECTOR


CODE:2W2/2WK2




CODE:3W3/3WK3




CODE:5W5 MALE




CODE:8W8 MALE

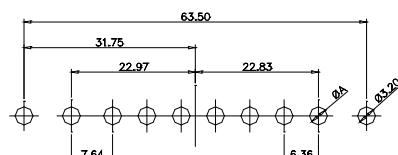

CODE:5W5 FEMALE



CODE:8W8 FEMALE

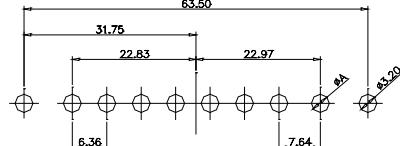

CURRENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2


# 627C/628C SERIES




## Power Combo D-Sub Connectors: Vertical

### PCB LAYOUT FOR COAXIAL D-SUB MALE AND FEMALE CONNECTOR


CODE:2W2/2WK2




CODE:3W3/3WK3

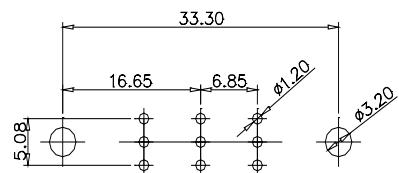


CODE:5W5 MALE

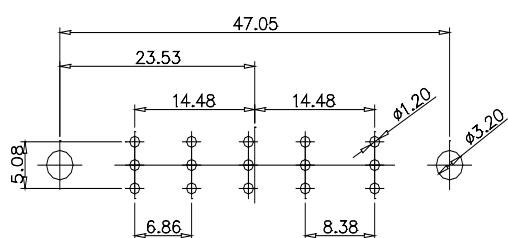


CODE:8W8 MALE

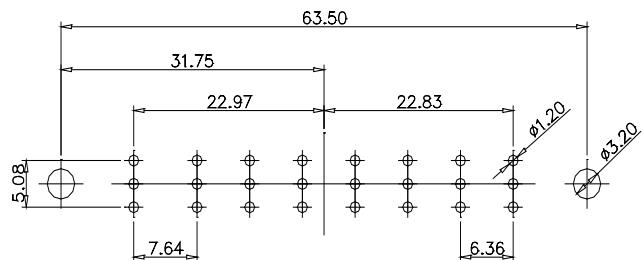

CODE:5W5 FEMALE

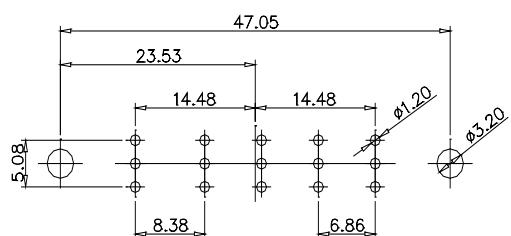



CODE:8W8 FEMALE

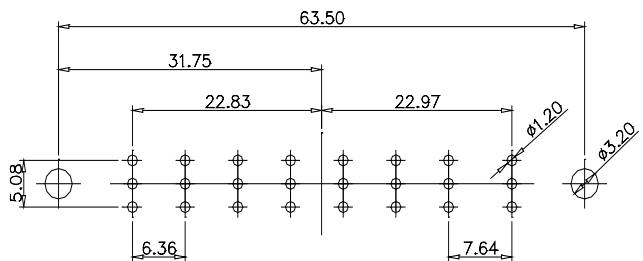


# 627C/628C SERIES

## Power Combo D-Sub Connectors: Vertical

### SOLDER CUP TYPE

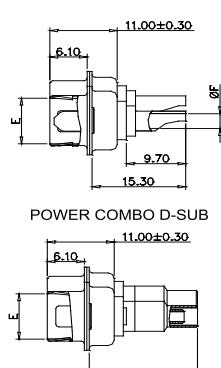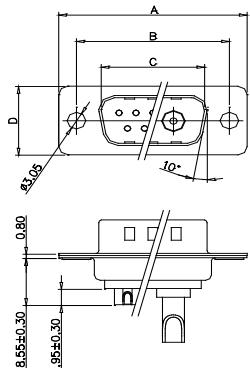

COAXIAL COMBO D-SUB


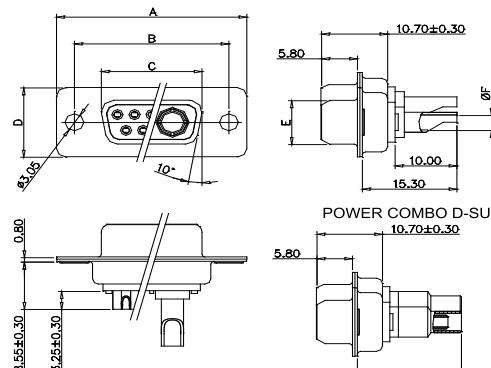


POWER COMBO D-SUB  
10.70±0.30  
COAXIAL COMBO D-SUB  
17.00


CONTACT SHELL SIZE	POWER D-SUB						
	DIMA	DIMB	DIMC	DIMD	DIME	RATING	ØF
SIZE 9	30.80	25.00	16.90	12.50	8.30	10A	1.7
SIZE 15	39.20	33.30	25.25	12.50	8.30	20A	2.7
SIZE 25	53.05	47.05	38.95	12.50	8.30	30A	3.5
SIZE 37	69.40	63.50	55.40	12.50	11.15	40A	4.6
SIZE 50	67.00	61.00	52.80	15.30	11.15		
COAXIAL D-SUB							

CONTACT SHELL SIZE	POWER D-SUB						
	DIMA	DIMB	DIMC	DIMD	DIME	RATING	ØF
SIZE 9	30.80	25.00	16.30	12.50	7.90	10A	1.7
SIZE 15	39.20	33.30	24.60	12.50	7.90	20A	2.7
SIZE 25	53.05	47.05	38.40	12.50	7.90	30A	3.5
SIZE 37	69.40	63.50	54.80	12.50	7.90	40A	4.6
SIZE 50	67.00	61.00	52.20	15.30	10.90		
COAXIAL D-SUB							

### STRAIGHT PCB TYPE

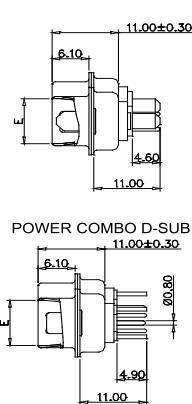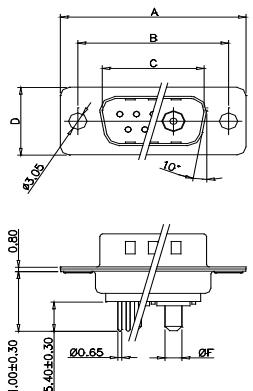

POWER COMBO D-SUB  
11.00±0.30  
COAXIAL COMBO D-SUB  
11.00

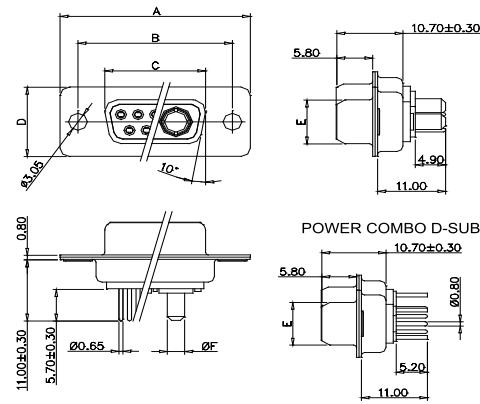


POWER COMBO D-SUB  
10.70±0.30  
COAXIAL COMBO D-SUB  
11.00

CONTACT SHELL SIZE	POWER D-SUB						
	DIMA	DIMB	DIMC	DIMD	DIME	RATING	ØF
SIZE 9	30.80	25.00	16.90	12.50	8.30	10A	1.7
SIZE 15	39.20	33.30	25.25	12.50	8.30	20A	2.8
SIZE 25	53.05	47.05	38.95	12.50	8.30	30A	3.2
SIZE 37	69.40	63.50	55.40	12.50	11.15	40A	3.75
SIZE 50	67.00	61.00	52.80	15.30	11.15		
COAXIAL D-SUB							


CONTACT SHELL SIZE	POWER D-SUB						
	DIMA	DIMB	DIMC	DIMD	DIME	RATING	ØF
SIZE 9	30.80	25.00	16.30	12.50	7.90	10A	1.7
SIZE 15	39.20	33.30	24.60	12.50	7.90	20A	2.8
SIZE 25	53.05	47.05	38.40	12.50	7.90	30A	3.2
SIZE 37	69.40	63.50	54.80	12.50	7.90	40A	3.75
SIZE 50	67.00	61.00	52.20	15.30	10.90		
COAXIAL D-SUB							

### SOLDER CUP TYPE MOUNTING OPTION

CODE:A



CODE:A



# 627C/628C SERIES




## Power Combo D-Sub Connectors: Vertical


### Power & Coaxial Combo D-SUB

#### STRAIGHT PCB TYPE MOUNTING OPTION


CODE:1

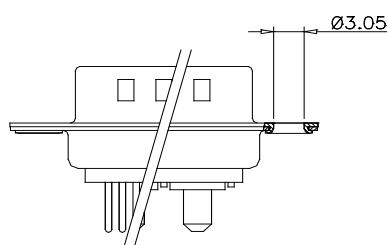


CODE:2/A

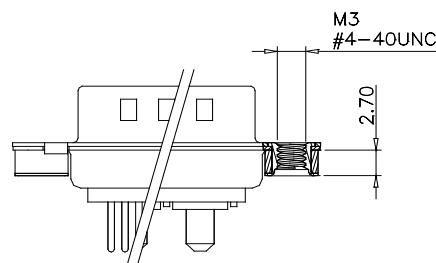


CODE:3/B

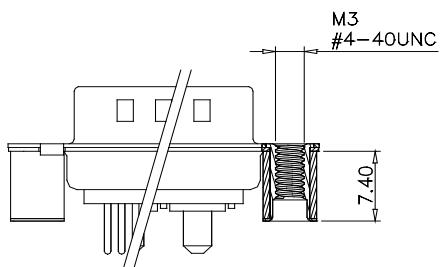


CODE:4/C

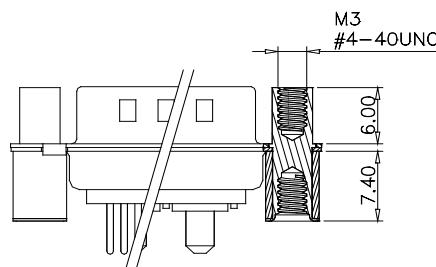

CODE:5/D

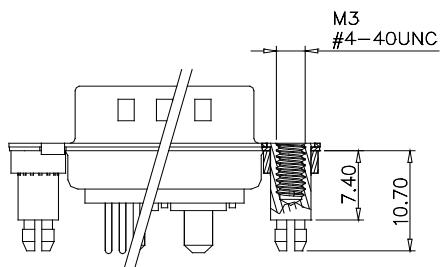

CODE:6/E

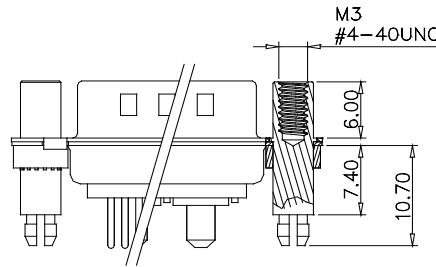

# 627C/628C SERIES




## Power Combo D-Sub Connectors: Vertical


### Power Combo D-SUB

#### PCB LAYOUT FOR MALE AND FEMALE CONNECTOR


CODE:5W1  
MALE/FEMALE




CODE:7W2  
MALE/FEMALE

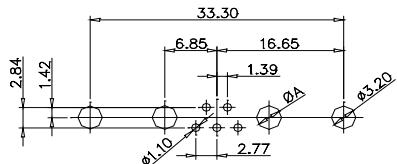


CODE:11W1  
MALE/FEMALE

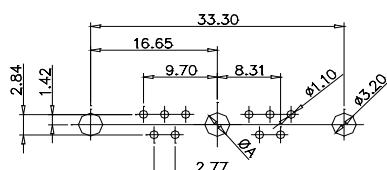


CODE:17W2  
MALE/FEMALE

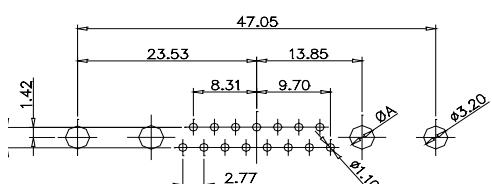


CODE:24W7  
MALE/FEMALE

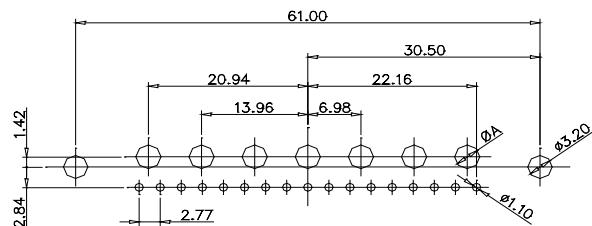


CODE:21W4  
MALE/FEMALE

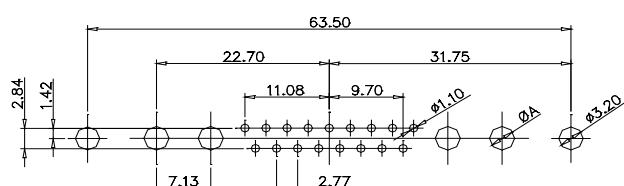

CODE:27W2  
MALE/FEMALE

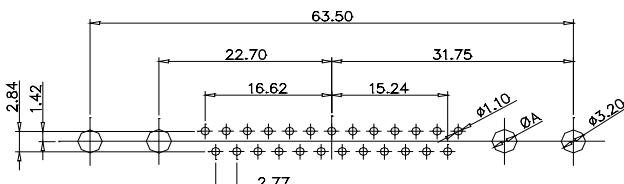

CODE:21W1  
MALE/FEMALE

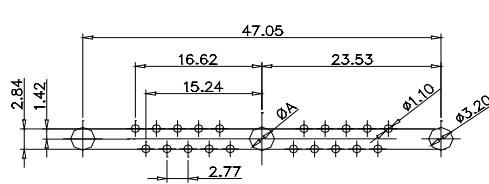

CUREENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2

# 627C/628C SERIES




## Power Combo D-Sub Connectors: Vertical


### Power Combo D-SUB

#### PCB LAYOUT FOR MALE CONNECTOR


CODE:9W4  
MALE

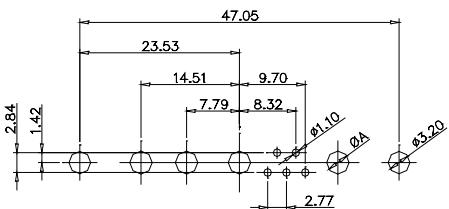


CODE:25W3  
MALE

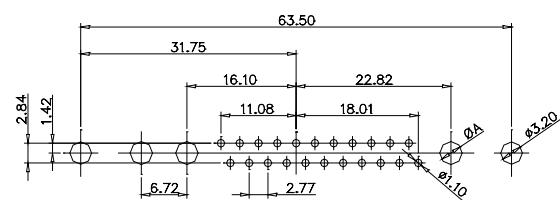


CODE:13W3  
MALE

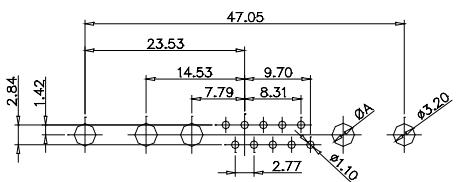


CODE:36W4  
MALE

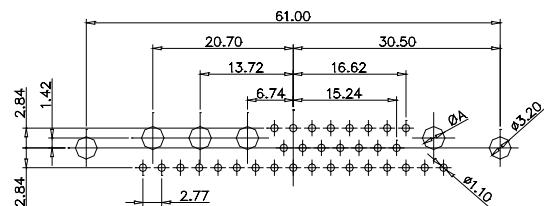


CODE:13W6  
MALE

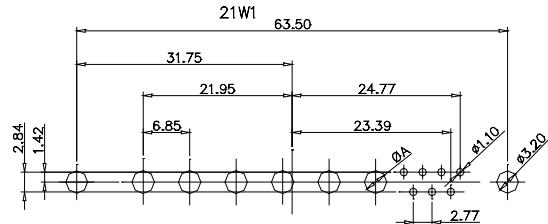


CODE:43W2  
MALE

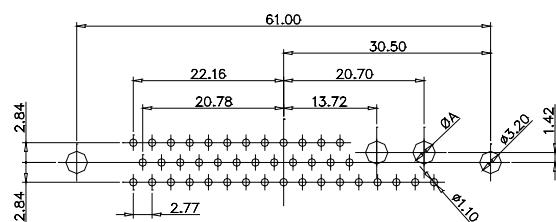

CODE:17W5  
MALE

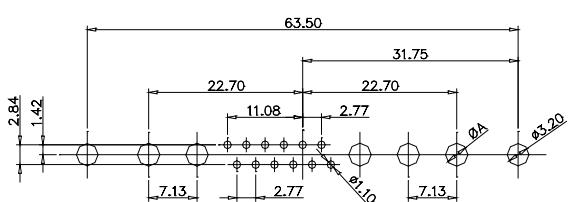

CODE:47W1  
MALE

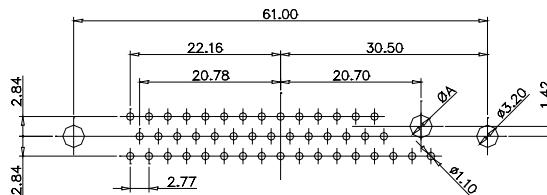

CUREENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2

# 627C/628C SERIES




## Power Combo D-Sub Connectors: Vertical


### Power Combo D-SUB

#### PCB LAYOUT FOR FEMALE CONNECTOR


CODE:9W4  
FEMALE

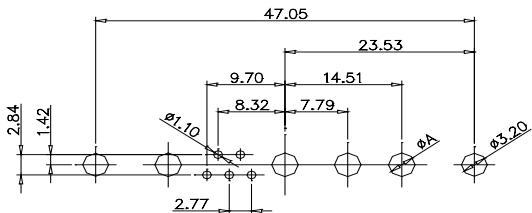


CODE:25W3  
FEMALE

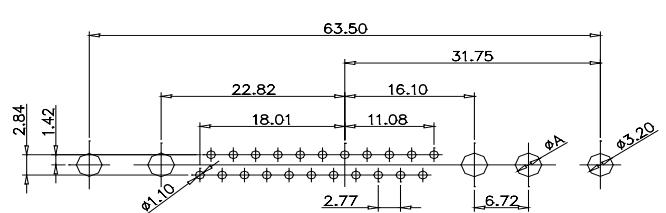


CODE:13W3  
FEMALE

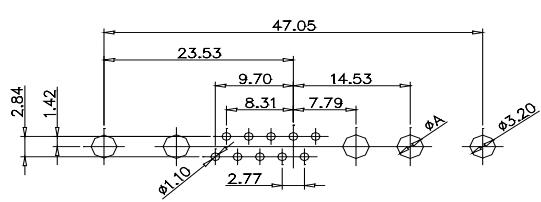


CODE:36W4  
FEMALE

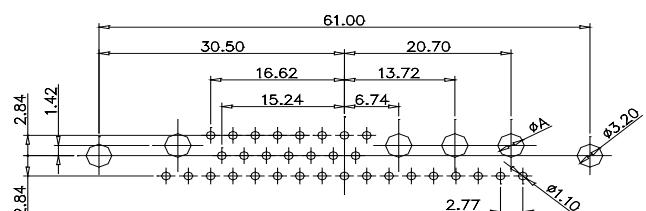


CODE:13W6  
FEMALE

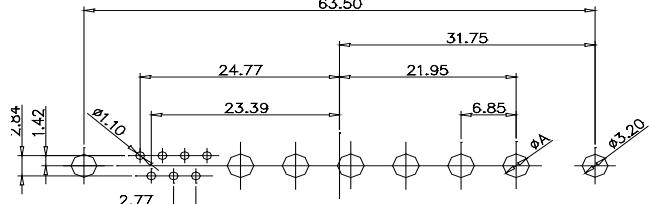


CODE:43W2  
FEMALE

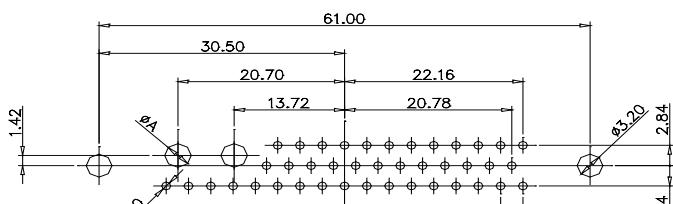

CODE:17W5  
FEMALE

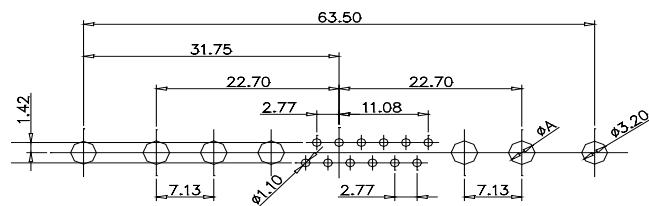

CODE:47W1  
FEMALE

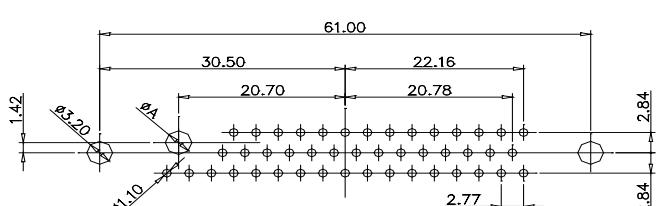


CUREENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2

# 627C/628C SERIES


## Power Combo D-Sub Connectors: Vertical

### STRAIGHT PCB TYPE MOUNTING OPTION


CODE:1




CODE:2/A




CODE:3/B




CODE:4/C



CODE:5/D




CODE:6/E




### PCB LAYOUT FOR POWER D-SUB MALE AND FEMALE CONNECTOR


CODE:2W2/2WK2




CODE:3W3/3WK3




CODE:5W5 MALE




CODE:8W8 MALE

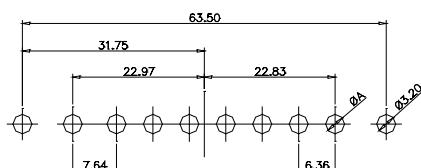

CODE:5W5 FEMALE



CODE:8W8 FEMALE

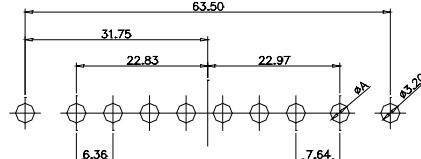

CURRENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2


# 627C/628C SERIES




## Power Combo D-Sub Connectors: Vertical

### Coaxial Combo D-SUB


5W1 Male/Female




24W7 Male/Female

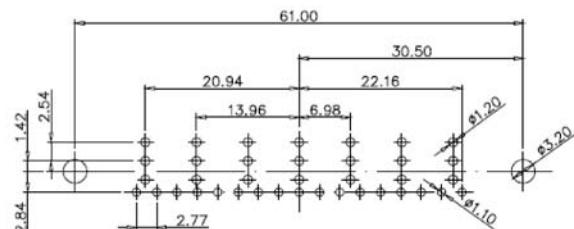


7W2 Male/Female

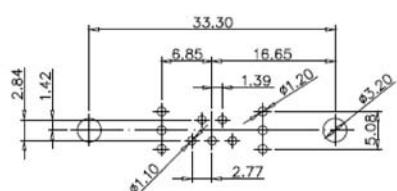


21W4 Male/Female

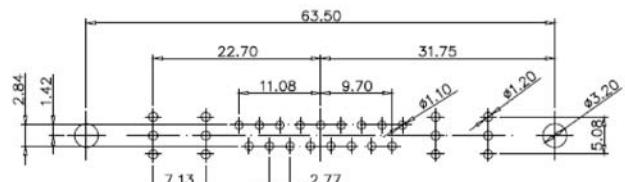


11W1 Male/Female

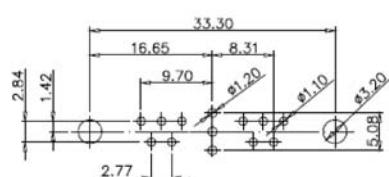


27W2 Male/Female

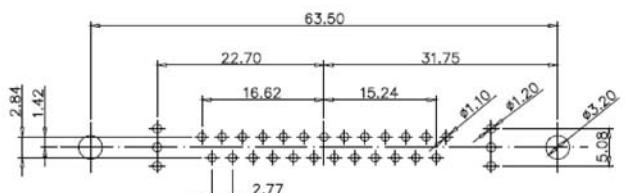

17W2 Male/Female

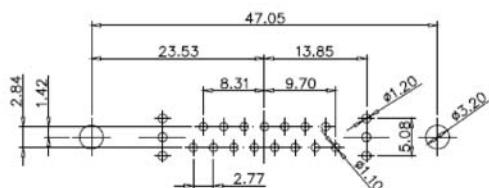

21W1 Male/Female

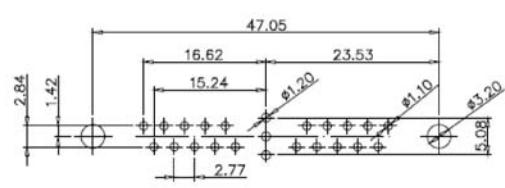


# 627C/628C SERIES


## Power Combo D-Sub Connectors: Vertical

### Coaxial Combo D-SUB


9W4 Male

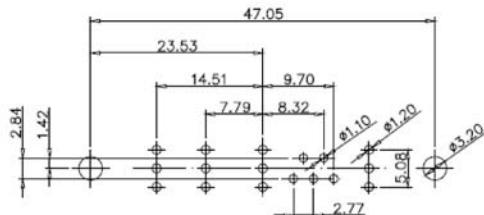


25W3 Male

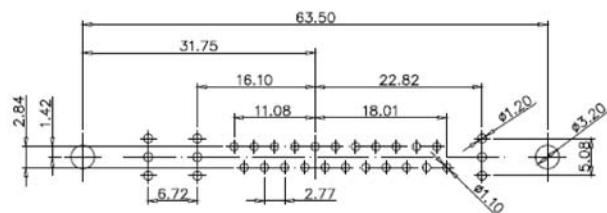


13W3 Male

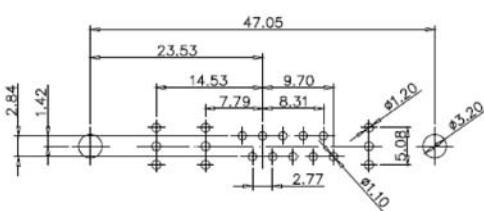


36W4 Male

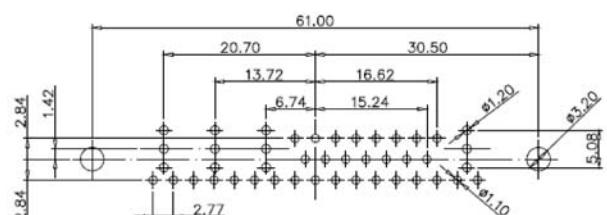


13W6 Male

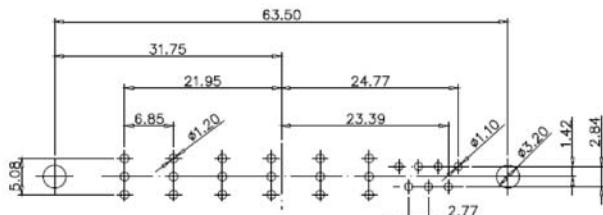


43W2 Male

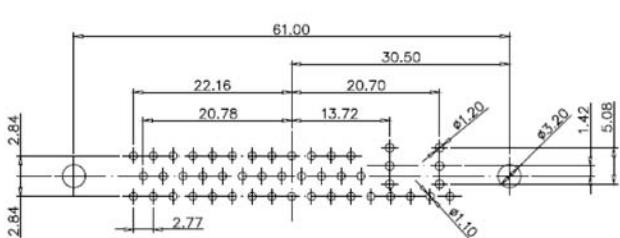

17W5 Male

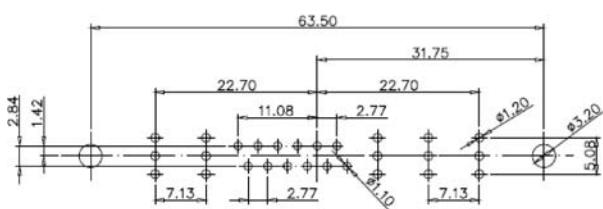

47W1 Male

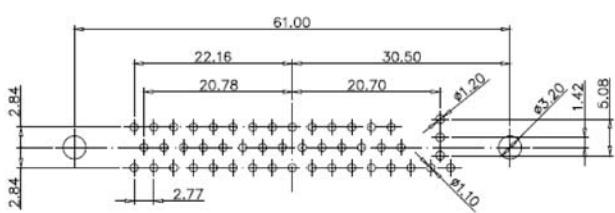


# 627C/628C SERIES




## Power Combo D-Sub Connectors: Vertical

### Coaxial Combo D-SUB


9W4 Female

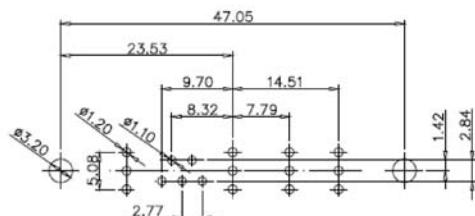


25W3 Female

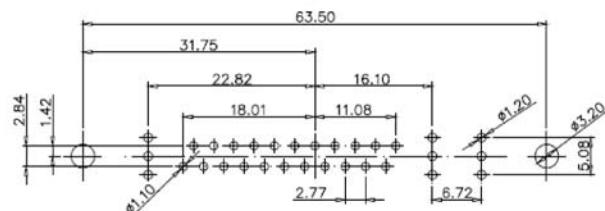


13W3 Female

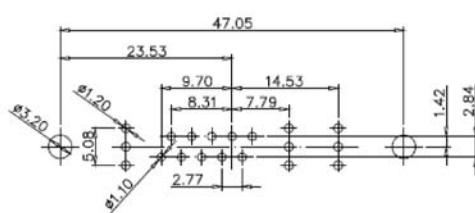


36W4 Female

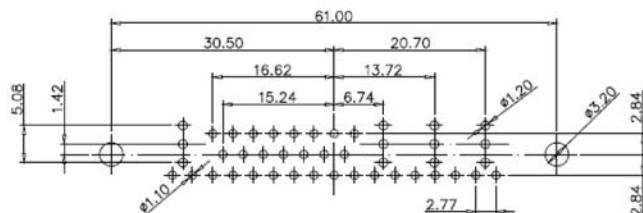


13W6 Female

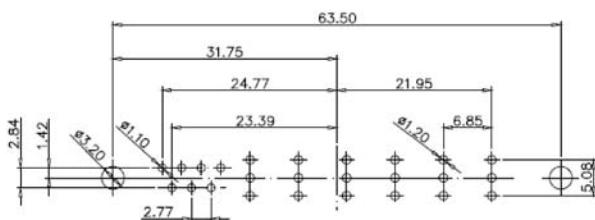

43W2 Female

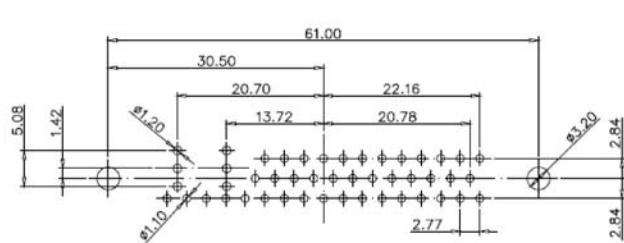

17W5 Female

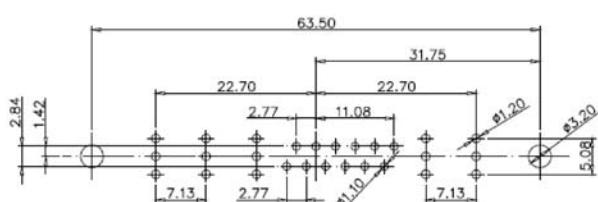

47W1 Female

